



**LEA**  
PROFESSIONAL

# LEA Connect 3.1.1.0 Firmware Update Readme

**\*\*\*NOTE – This firmware file is for all 80, 160, 350, and 700 watt models. The 1504 and 1504D requires a separate firmware file.**

## Firmware update instructions:

- The firmware updater is located in the WebUI in the top right corner. Click the Hamburger Menu, Choose File, and then Update Firmware.
- Click 'Choose Firmware File' – **unzip the firmware update file** and select .tar.xz file (ASBT-3-1-1-0-V2.tar.xz.enc) then click “update amps”
  - NOTE 1:** This firmware file works for ALL LEA Connect Series Amplifiers.
  - NOTE 2:** All amplifiers on the same network will be updated.
- The shark fin will turn magenta during the update process, please do not turn off or power cycle the amplifier until the firmware update is complete.
- Once the shark fin is blue and the LCD screen is illuminated, the firmware update process is complete.
- While not required, it is recommended to power cycle the amp with the power cord after the firmware update is complete.
- 350W and 700W models will take ~5 minutes to update firmware
- 80W and 160W models **may** take up to 15 minutes to update firmware

To Confirm the update was successful, click on the ⓘ and then Amp Settings. Scroll down to Device Information and you should have the following Firmware versions:

### 350W and 700W Models:

Firmware Version: 3.1.1.0

Power Supply Version: 2.1.1.0

Amp1234 Version: 2.1.1.0


### 80W and 160W Models:

Firmware Version: 3.1.1.0


Power Supply Version: 2.1.1.0

Amp1-8 Version: 2.1.1.0


Click the Hamburger Menu

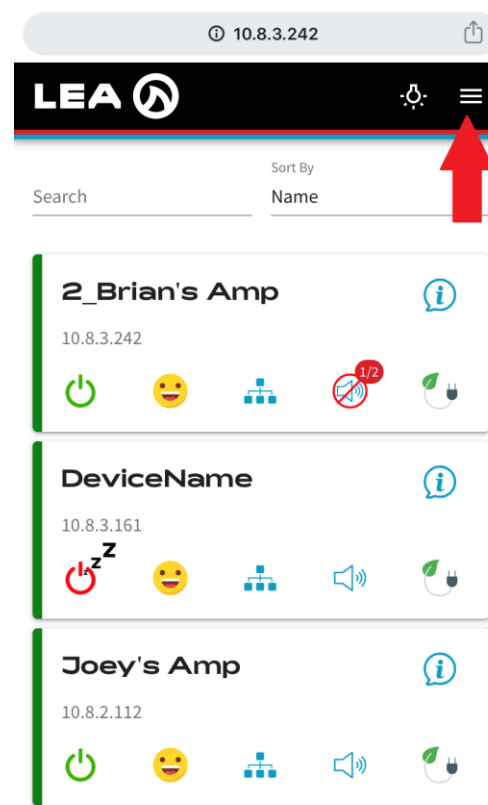

Click 'Firmware Update'

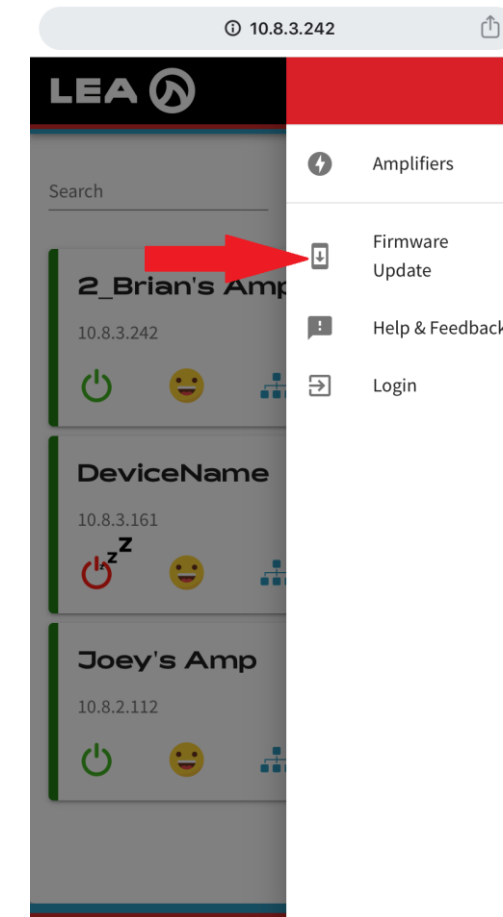

1. Choose file: ASBT-3-1-1-0-V2.tar.xz.enc
2. Click 'Update Amps'

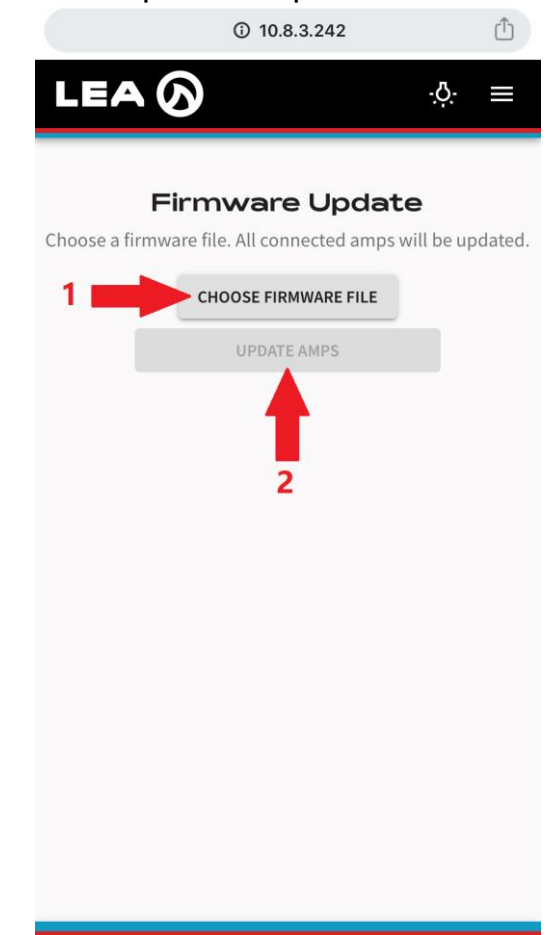

## Features and Improvements in 3.1.1.0 V2:

### WebUI and General updates

- Updates to WiFi and Access Point Linux Driver
- Resolves an issue with the AP displaying 0.0.0.0 IP address.
- Adds link local auto IP addressing on LAN port.

### Sharkware updates

- Initial release – for use with all 80/160 and 350/700-watt models.
  - Sharkware must be used with this Firmware Version release for full functionality

### Additional Firmware Update Information:

- <https://leaprofessional.com/blog/connect-series-firmware-v3/>